

EA900Pro RT

1KVA ~ 3KVA
PF 0.9



Specifications

MODEL	EA901PSRT	EA901PHRT	EA902PSRT	EA902PHRT	EA903PSRT	EA903PHRT				
Capacity	1 KVA / 900 W		2 KVA / 1800 W		3 KVA / 2700 W					
INPUT										
Rated voltage	208 V / 220 V / 230 V / 240 Vac									
Voltage range	110 ~ 176 Vac (linear derating between 50% and 100% load); 176 ~ 280 Vac (no derating); 280 ~ 300 Vac (derating 50%)									
Frequency	40 ~ 70 Hz (auto-sense)									
Power factor	≥ 0.99									
Bypass voltage range	-25% ~ +15% (settable)									
OUTPUT										
Voltage	208 V / 220 V / 230 V / 240 Vac (settable via LCD)									
Voltage regulation	± 1%									
Frequency	45 ~ 55 Hz or 55 ~ 65 Hz (synchronized range); 50 / 60 Hz ± 0.1 Hz (battery mode)									
Waveform	Sinusoidal									
Crest factor	3:1									
Harmonic distortion	≤ 2% (linear load); ≤ 5% (non-linear load)									
Transfer time	Mains mode to battery mode: 0 ms Inverter mode to bypass mode: 4 ms (typical)									
Overload capability	105% ~ 125%: transfer to bypass in 1 min; 125% ~ 150%: transfer to bypass in 30 s; > 150%: transfer to bypass in 300 ms									
EFFICIENCY										
Mains mode	≥ 90%		≥ 91%		≥ 92%					
Battery mode	≥ 85%		≥ 86%		≥ 87%					
ECO mode	≥ 95%		≥ 96%		≥ 97%					
BATTERIES										
DC voltage	24 V	36 V	36 V	48 V	72 V	72 V	72 V	96 V	96 V	
Inbuilt battery	2 × 9 Ah	3 × 7 Ah	/	4 × 9 Ah	6 × 7 Ah	/	6 × 9 Ah	8 × 7 Ah	/	
Charging current (max.)	1 A		6 A		1 A		6 A		1 A	
Recharge time	8 h									
ALARMS										
Utility failure	4 s per beep									
Low battery	1 s per beep									
Overload	1 s twice beep									
UPS fault	Long beep									
COMMUNICATIONS										
RS232 (standard) / USB (optional)	Supports Windows® 98 / 2000 / 2003 / XP / Vista / 2008 / Windows® 7 / 8 / 10									
SNMP (optional)	Power management from SNMP manager and web browser									
OTHERS										
Operating temperature	0 ~ 40°C									
Relative Humidity	0 ~ 90% (non-condensing)									
Noise level	≤ 50 dB (1m)									
Dimensions (W × D × H) (mm)	440 × 468 × 88		440 × 658 × 88		440 × 468 × 88 (UPS) 440 × 440 × 86 (BAT)		440 × 658 × 88 (UPS) 440 × 580 × 86 (BAT)		440 × 468 × 88	
Packaged dimensions (W × D × H) (mm)	545 × 592 × 198		545 × 782 × 198		545 × 592 × 198 (UPS) 590 × 580 × 200 (BAT)		545 × 782 × 198 (UPS) 590 × 580 × 200 (BAT)		545 × 592 × 198	
Net weight (kg)	12.26	13.78	7.58	22.73	25.86	9.66	29.26	9.45 (UPS) 27.2 (BAT)	10.04	10.04
Gross weight (kg)	15.78	17.3	11.1	26.63	29.76	13.18	33.16	12.97 (UPS) 30.2 (BAT)	13.56	13.56



● Derate capacity to 70% in CUCF mode and to 90% when the output voltage is adjusted to 208Vac.
● S means standard model, H means long time model.
● All specifications subject to change without notice.
● Custom-made specifications are acceptable.

Features

- High frequency and true double-conversion
- DSP (Digital Signal Processors) technology
- Input power factor correction (PFC)
- Wide input voltage range (110V~300V)
- Output power factor 0.9
- Cold start
- Auto sensing frequency
- ECO mode operation for energy saving
- Selectable output voltage via LCD
- Output bypass settable via LCD
- Power-on self test
- Advanced battery management (ABM)
- Short circuit and overload protection
- Automatic charging in OFF mode
- Auto control fan speed when loads varies
- Standard RS232 communication port and RJ45 protection
- Optional USB / SNMP communication port
- Optional emergency power off (EPO)
- Optional extension battery bank

Rear Panel

1. Overcurrent Protection
2. AC Input
3. Modem/Tel/Fax
4. DC Input
5. Outlet
6. FAN
7. RS232
8. EPO (optional)
9. USB (optional)
10. Intelligent Slot

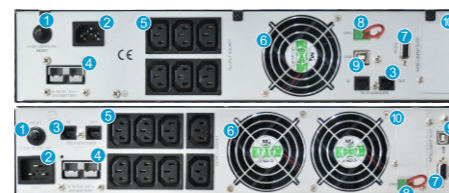

Optional sockets